LED AREA SERIES POST TOP

Project Name______
Product Code______
SKU No. ______
Memo. _____


















PRODUCT DESCRIPTION

The area series has the high-performance solution for the most demanding applications within a unique design. With different precision refractive optical lens and an easy-install design, it can be used in many applications such as pedestrian street, factory, schools, garden, courtyard, hotel, parking lot, public parks etc.

FEATURE

- 1. Air cooling Design
- 2.IP67 Rated Enclosure
- 3. Post top or Pendant Mounting
- 4. Superior Low-glare Illumination
- 5. Optional with Photocell Sensor
- 6.Beam Angle 60°/90°/130°

*If the customer does not specify a requirement, the inner diameter defaults to 62mm(2.44in).

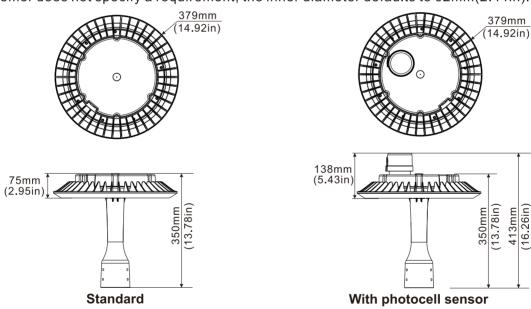

Ordering Information

Area Series	Watts	Version	сст	Voltage	Control	Installation	Beam Angle	Color
BB-LD	50W 75W 100W 150W 180W	AR-B1	ww- 3000K nw- 4100K Dw- 5000K cw- 5700K		Blank - without control PC - Photocell Sensor	Blank- 2.44in(62mm) pole	Flat cover: 130°; Ring lens: 60°/90°; Bead lens: 60°/90°;	Blank-bronze

Notes:

- 1. 130lm/w,150lm/w is optional, the default is 130lm/w.
- 2. Customers can choose a lamp with a baffle as needed.

Special Order-Ask Customer Service

PERFORMANCE DATA

Power	50W	75W	100W	150W	180W		
Model	BB-LD-50W-AR-B1	BB-LD-75W-AR-B1	BB-LD-100W-AR-B1	BB-LD-150W-AR-B1	BB-LD-180W-AR-B1		
Luminous Flux	6500lm	9750lm	13000lm	19500lm	23400lm		
Replacement	HPS 150W	HPS 200W	HPS 300W	HPS 500W	HPS 600W		
Light Source	SMDLED						
Luminous Efficacy	130lm/w 150lm/w available						
Operation Temp.	-40 to +45℃						
CCT	2700K SW / 3000K WW / 4100K NW / 5000K DW / 5700K CW / 6500K SCW						
CRI	85						
Life Span	50,000 hours at 25℃						
Voltage	100-277VAC/50-60HZ						
Driver	UL listed power supply						
Dimming	Available						
With Sensor	Photocell sensor available						
Color	Bronze						
Cover	Transparent Lens						
Beam Angle	Flat cover:130°; Ring lens:60°/90°; Bead lens:60°/90°;						
IP	65						
PF	>0.95						
Warranty 3/5 Years							

PROJECTS


By using our 100W Area Light to replace 300W Metal Halide bulb for parking area lighting fixtures, the customer is now able to save a lot per month from his electric bill.



Notes:


- 1. Don't take the LED lamp apart.
- 2. The LED lamp must work under the right voltage according to the specification.

LUMINOUS INTENSITY DISTRIBUTION

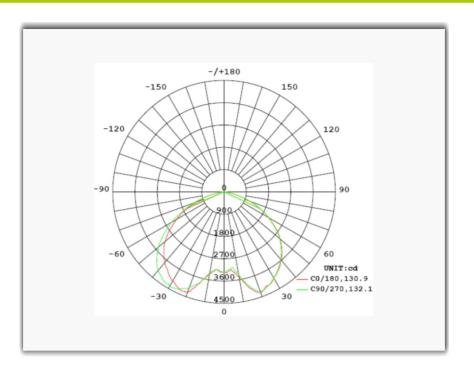

APPLICATION

- Courtyard lighting
- O Public parks lighting
- O Street scapes lighting
- O Parking areas lighting
- O Hotel lighting

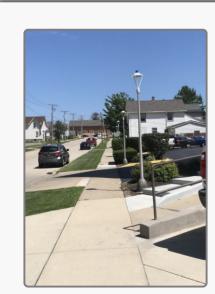

Street scapes lighting



Hotel lighting




Public parks lighting

INSTALLATION


Fixture assembly

- O Feed the Housing wires through the tenon pole adaptor .
- Secure the tenon pole adaptor to the lamp with four M4 screws.
- O Make sure the screws are tight and there is no looseness.

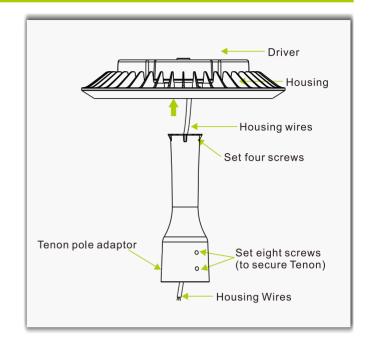


Pole mounting

- O Turn off the power before installation.
- Wiring right in the wiring box("Black"is connected to"L","White"connect to"N","Green"to"Ground") and set the lamp into the bracket by the hole.(picture1).
- We should fasten the eight screws with a hex wrench, and finished(picture2).

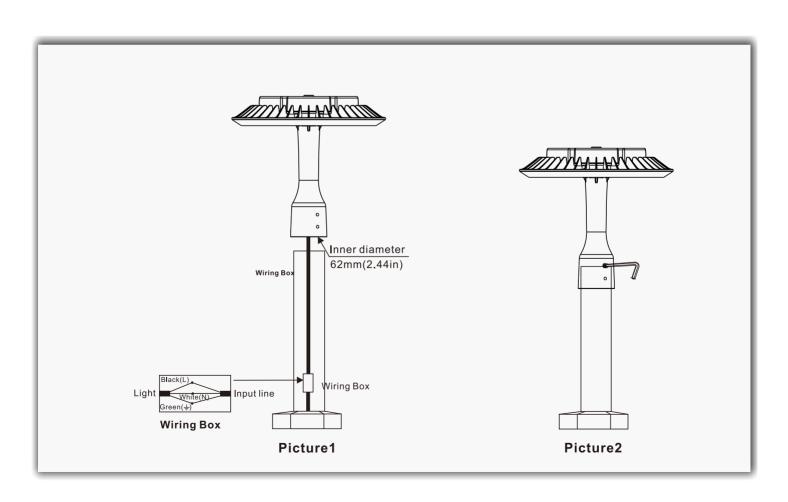


Wiring

- O Connect the black fixture lead to the (+) LINE supply lead.
- O Connect the white fixture lead to the (-) COMMON supply lead.
- O Connect the green Ground wire from fixture to supply ground.

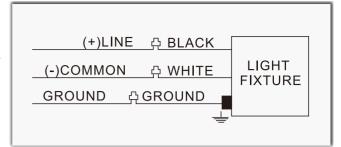

Optional Accessories

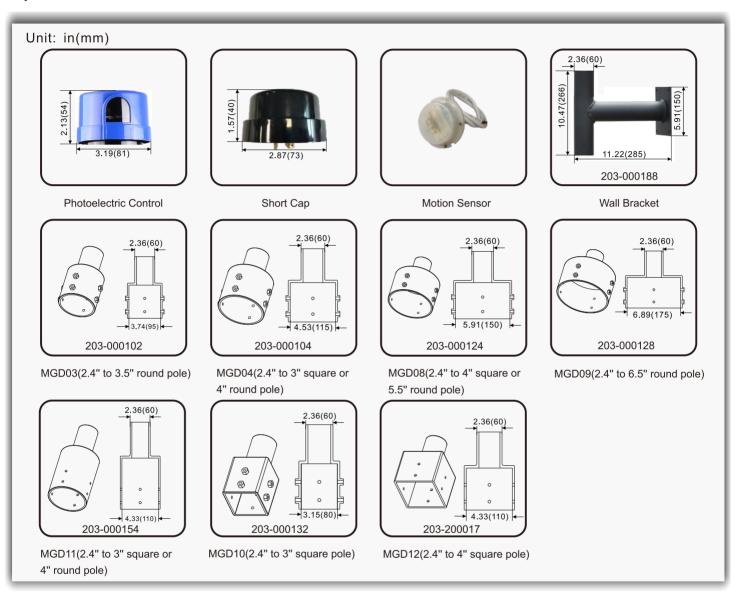

PACKING INFO



Packaging	Carton Size(mm) (L*W*H)	N.W	G.W	Volume weight
1pc/CTN	420*420*180mm	3.5kg	4.5kg	7.5kg